

CALIBER® LowPro Glides™ & Multi-Glides™ Extension Set

Installation Instructions for Part No. 13313, 13314, 13321 & 13323

TOOLS REQUIRED:

- Power Drill with #2 Phillips Bit
- Saw
- Marker

HARDWARE INCLUDED:

Qty	Description
4	30" Glide Sections
1	33 Pack of Stainless Screws


READ ALL INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION

LowPro Glides and Multi-Glides Extension Sets are offered to complete 12 foot trailers and ramps.

NOTE: If CALIBER salt shield will be used, install the shield first and then you will need to cut the glides to the proper length so they do not overlap the shield. Cut the end of the glide that does not have any slots. Glides may be cut with any saw suitable for wood, plastic or metal.

STEP 1: Place glides on trailer in desired location and cut to length if needed.

STEP 2: At the non-slotted end of each glide, place a screw through each outer flange 1" in from the end of each glide. The remaining screws will go into the slots. Place them in the center of each slot, leaving a 1/16" gap between the head of the screw and the glide. This allows the glides to expand and contract in various temperatures without buckling.

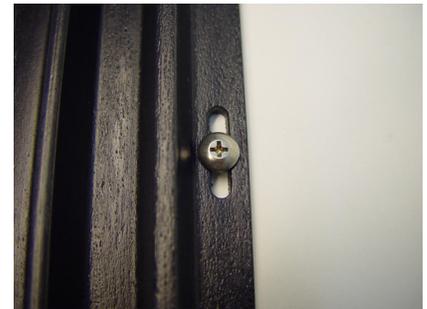

NOTE: Pre-drilling holes for the screws in the glides or trailer are not required if the trailer deck is wood. The screws supplied with this kit are not meant to be used in steel or aluminum, but can be if an 11/64" drill bit is used first to drill a pilot hole. Caution should be used in areas where marker lights and wires have been installed under the trailer deck when installing all fastener.

WARNING: These products are designed only to reduce resistance created when loading/unloading snowmobiles from a trailer deck or ramp. Surfaces are slippery, especially when wet or covered with frost, ice and/or snow. Extreme caution should be taken when walking or climbing on any trailer deck on which **Multi-Glides™** or **Grips™** are installed. Do not stand behind snowmobiles when loading/unloading. Always load snowmobiles at low speeds using extreme caution.

LIFETIME LIMITED WARRANTY

CALIBER warrants this product to be free from defects in material and workmanship under use for the purpose it was intended. CALIBER shall not be liable for damage or injury caused by defective materials or workmanship. CALIBER may elect to repair or replace this product, but is the sole judge of any defects in their product. This warranty does not cover any labor costs to remove or reinstall this product and is effective for one year from the original purchase date.

CALIBER®

952-985-9999

www.caliberproductsinc.com

CI5017